

Salisbury Cathedral Stained Glass
The Cathedral, Salisbury, Wiltshire, SP1 2EN
glass@salcath.co.uk
Accredited to ICON
www.salisburycathedral.org.uk

Our Ref SK1438

21st July 2026

St Lawrence Chapel
c/o Mr Ian Frostick
High Street
Warminster
Wiltshire

Dear Mr Frostick

Re: St Lawrence Chapel, Warminster

With reference to your e-mail, we have updated our estimate for the required alterations to the specification as follows. The below costs will be held for 6 months.

Tower Window (north elevation)

A window comprising if 1 no main light at high level direct glazed into the stonework. The glazing is in poor condition and requires restoration.



To carry out the removal of the glazing, return to the workshop, strip the glass from the old lead work and re-lead using a new lead calm of the same visible profile as the original. The completed light to be waterproofed with traditional lead light cement and new copper wire ties soldered to the lead work joints to allow fixing to the internal saddle bars. All to be return to site and fixed into the existing stonework incorporating new non-ferrous bars painted black and finished with a lime based mortar.

There are also 2 no slit window in the tower staircase that require the replacement of broken glass



The broken glass to the 2 no slit windows to be removed and replaced with an appropriate 6mm plate glass, pointed into the stonework using a lime based mortar.

The above for the sum of £4,015.00 excluding VAT

South Elevation Window Guards

To provide new stainless steel, black powder coated wire guards to 2 no windows on the south elevation, each window comprising of 2 no main lights, 1 no large tracery and 2 no squints.




The shape of the guards to follow each of the individual stonework opening and be attached to the stonework using non-ferrous wire and screw fixings.

The above for the sum of £5,685.00 excluding VAT

West Window

To provide new stainless steel, black powder coated wire guards to 1 no window on the west elevation.

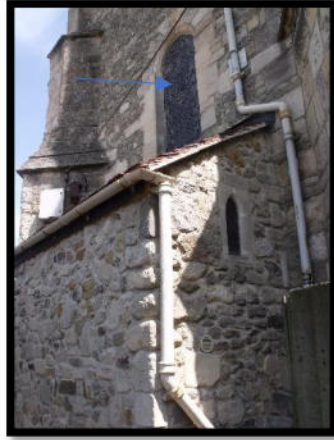

The shape of the guards to follow the stonework opening and be attached to the stonework using non-ferrous wire and screw fixings.

Note: As previously discussed this window can only be accessed in conjunction with works by others when a fixed scaffold is in place, to provide safe working.

The above for the sum of £1,741.00 excluding VAT


Note: This work will require a portable tower scaffolding externally on the south elevation to fix the wire guards. It will be removed at the end of each working day.

Works to the tower will require a fixed scaffold (supplied by others) to access the glazing.

All of the above costs are exclusive of VAT and are based on today's rates for labour and materials. Your attention is drawn to our standard terms and conditions enclosed.

Please contact me if we can be of further assistance.

Yours sincerely

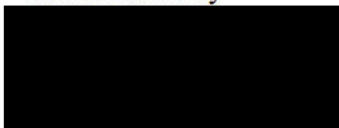

S Kelly ACR AMGP
Manager/Senior Conservator

