



SHEET LAYOUT

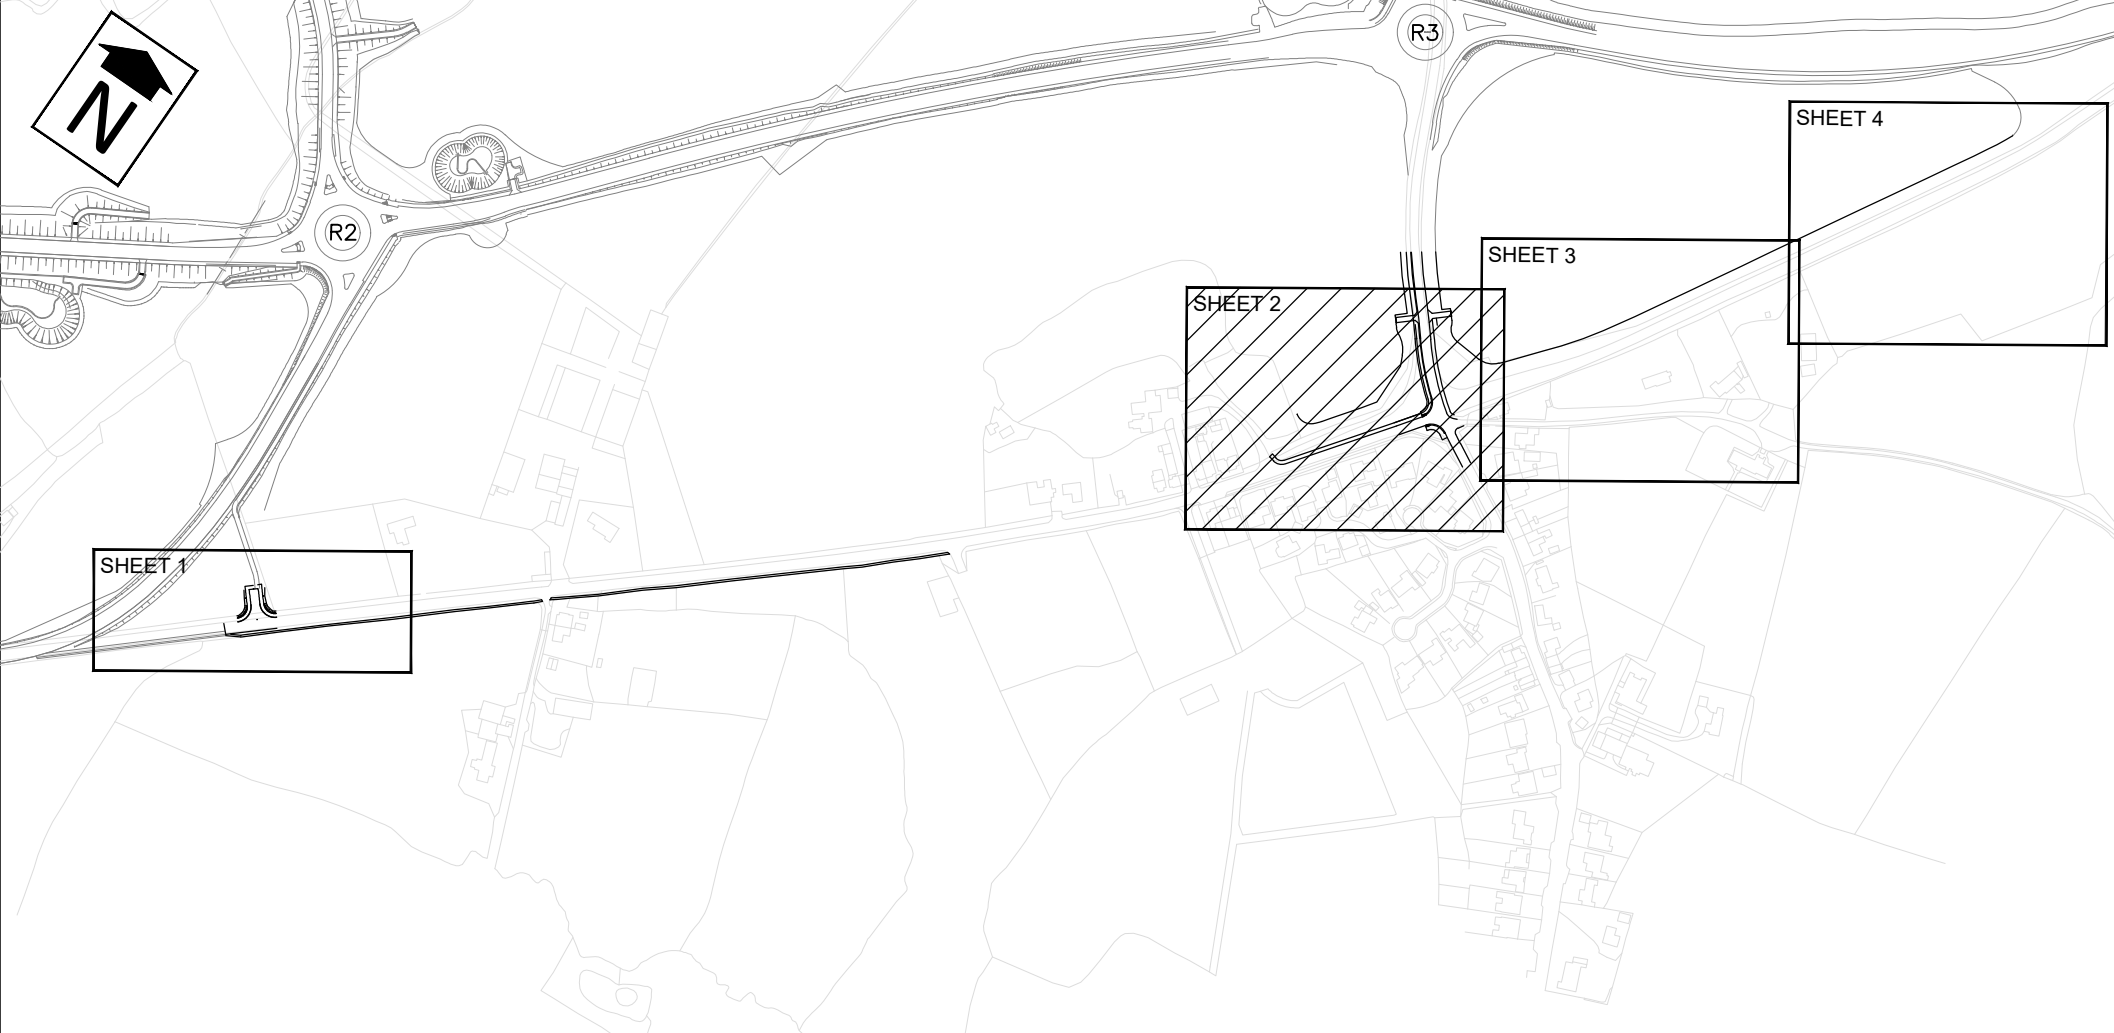

Key:	
	Carriageway Construction
	Footway Construction
	Hard Landscaping Construction
	Verge
	Farm Track Access
	Embankment
	Hedge to be removed
	Planting
	Concrete Channel
	High Friction Surfacing
	Existing carriageway to be broken up
	Vehicle Restraint System (VRS)
	Post & Rail Fence
	Vehicle Field Gate
	Kissing Gate
	Tactile Paving Colour: Buff
	Contrast Paving Colour: Grey
	Illuminated Bollard with keep left aspect
	Illuminated Bollard with blank aspect
	Street Lighting For Details refer to DPL lighting drawings
	Highway Sewer & Manhole with cover level, invert level and internal diameter
	Proposed Culvert
	Existing highway drainage
	Existing highway drainage to be removed
	Diverted Foul Water Sewer & Manhole with cover level, invert level and internal diameter. To be built in accordance with Type 2 manhole detail, Sewers For Adoption 7th edition.
	Existing Foul Water Sewer & Manhole
	Existing foul drainage to be removed
	Diverted Foul Rising Main
	Existing Foul Rising Main
	Proposed Road Gully to WC-HCD-500-D001
	150mm diameter perforated pipe and rodding eye for back of retaining wall drainage. Refer to Statlec drawings.
	Proposed Ditch
	Surface Water Channel Outlet to SHW Drawing F22
	Surface Water Channel
	Concrete bagwork headwall to WC-HCD-500-D010

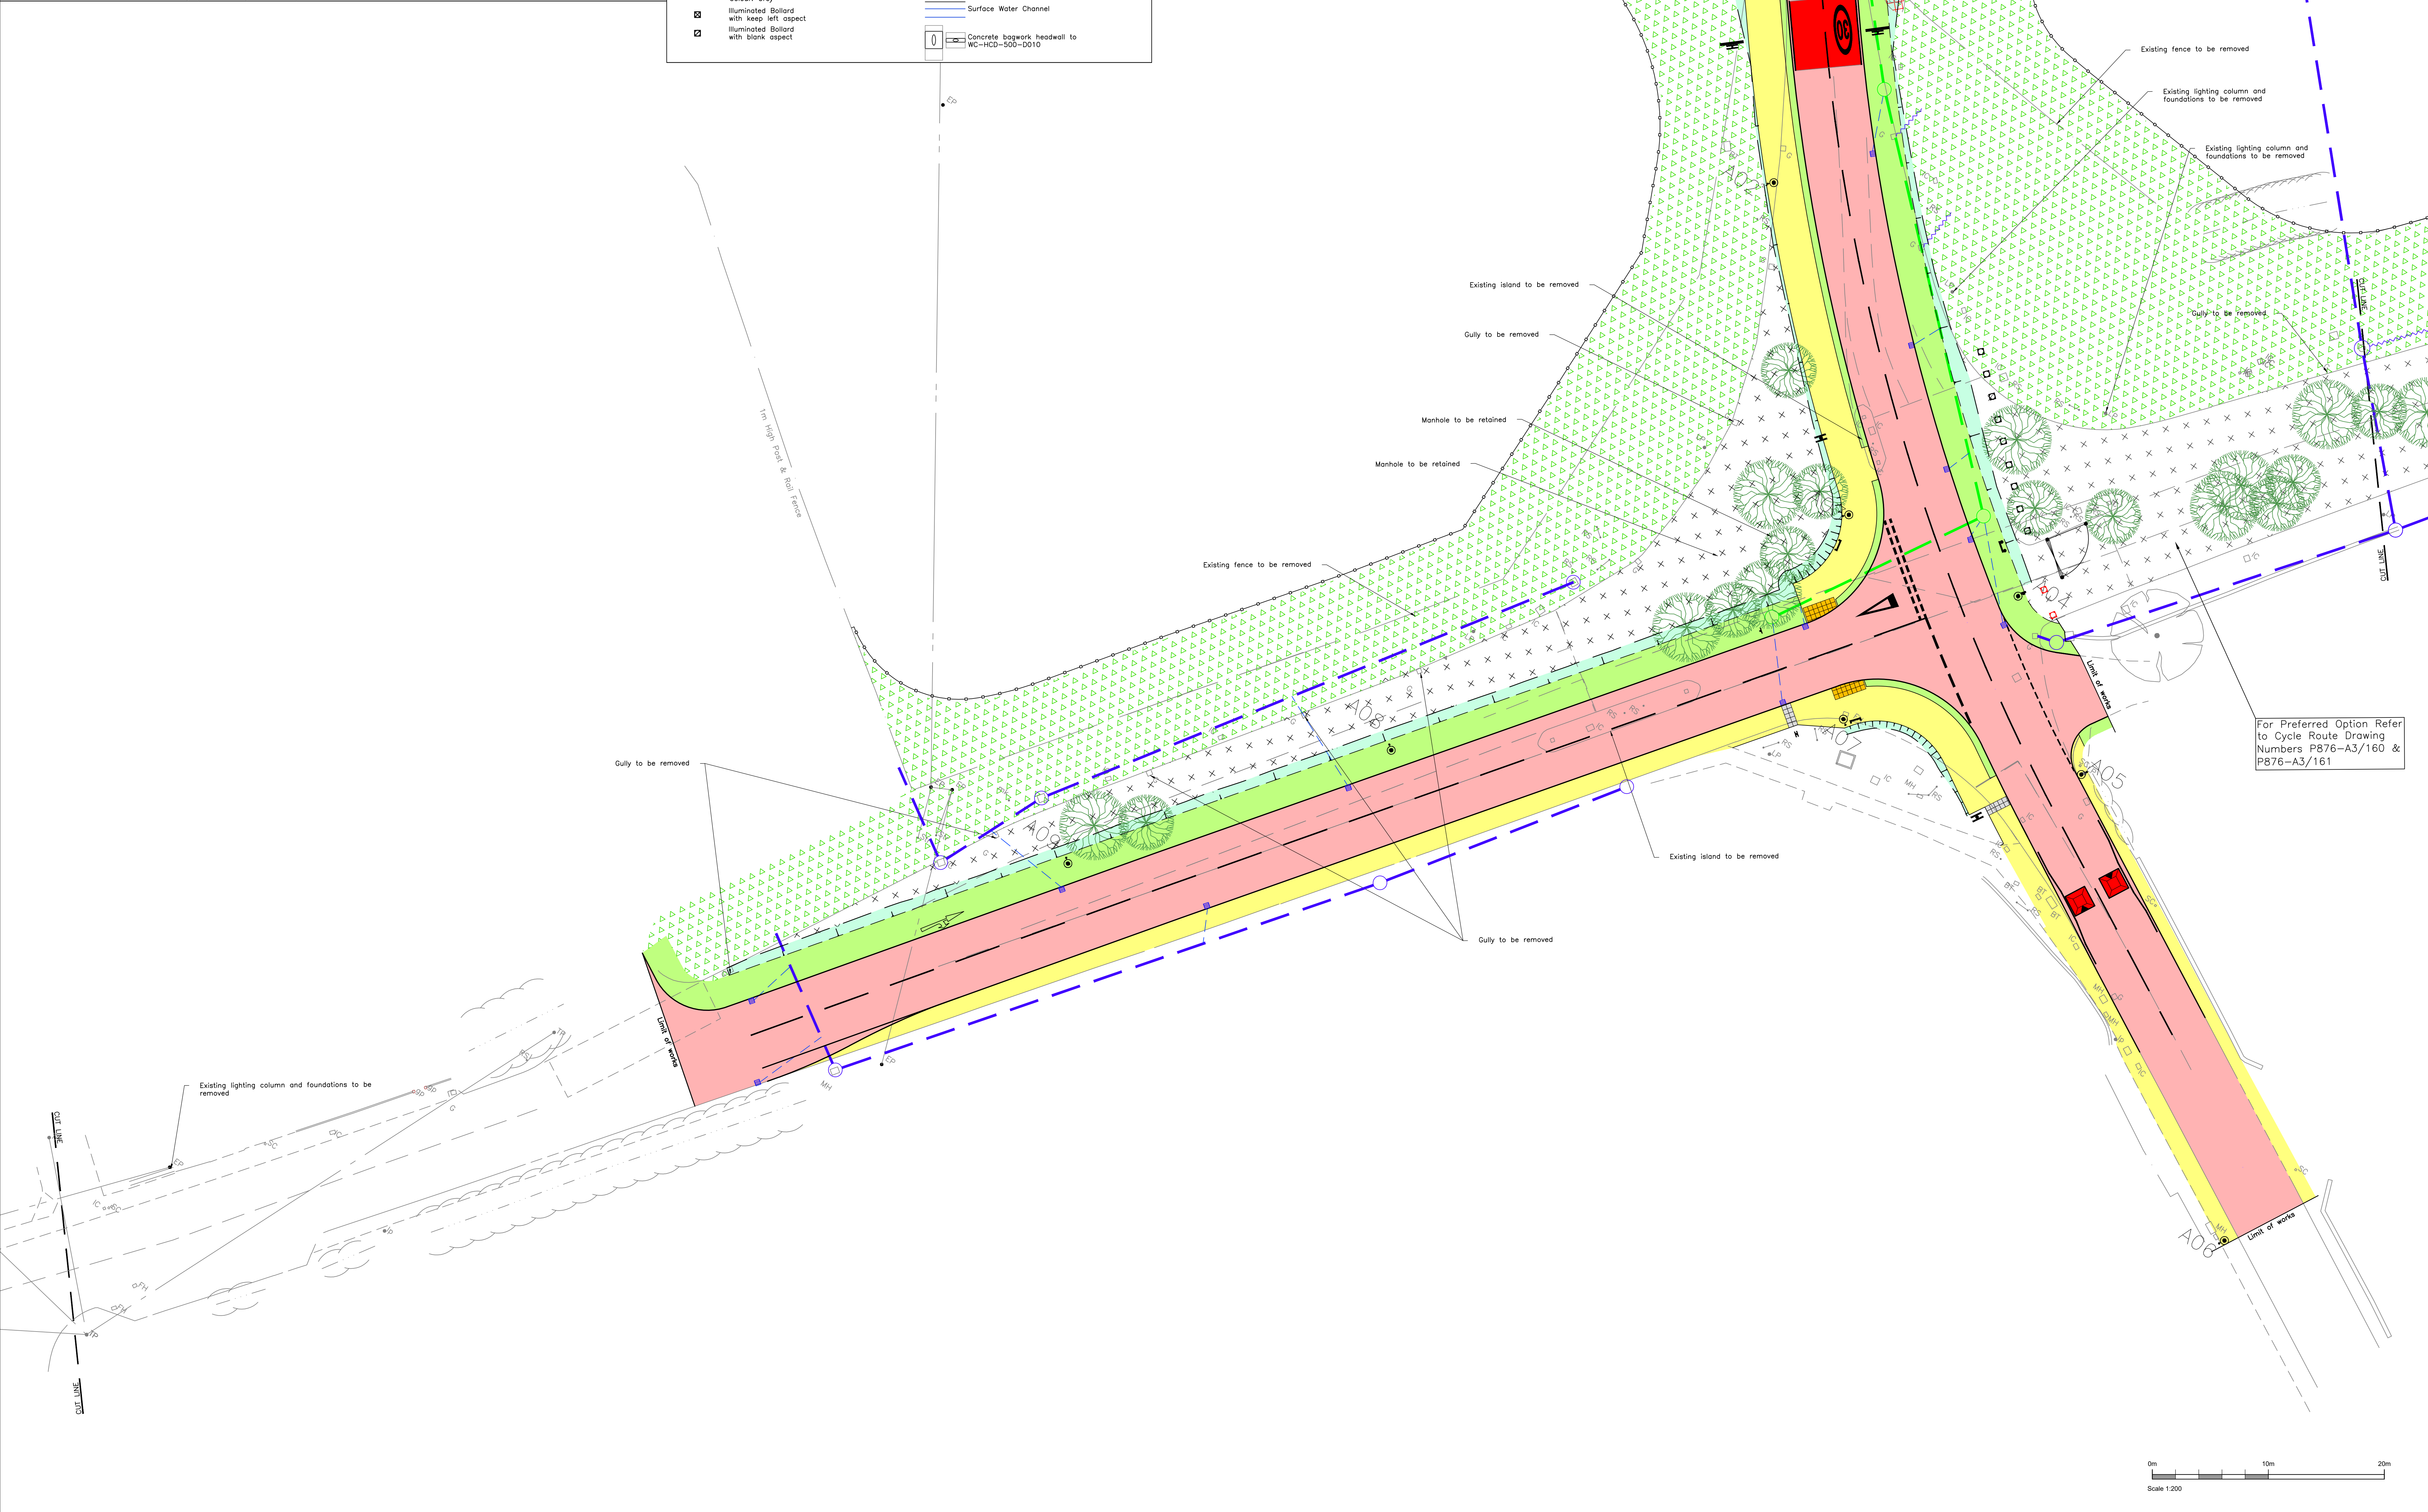

Stratton Park House, Wanborough Road
Swindon, SN3 4HG

Telephone
01793 828000

Website
www.pfapl.com

GENERAL NOTES

- This drawing is based on the Topographical Survey undertaken by D&H Surveys, dated Sept 2019.
- All adoptable highway works to be constructed in accordance with the current version of the Specification for Highway Works (SHW), published by The Stationery Office as Volume 1 of the Manual of Contract Documents, as amended.
- The Contractor shall seek clarification from the Engineer regarding any construction issue arising from this drawing, or any discrepancy between this drawing and any issued drawing or the Specification, prior to construction.
- The works shown on this drawing could affect Statutory Undertaker's apparatus and the Contractor is required to verify the location and depth of all such apparatus prior to commencement of the works and to take any precautions necessary when working in the vicinity of any such apparatus.
- All works within the limit of the highway shall be signed in accordance with the Traffic Signs Manual Chapter 8 Traffic Safety Measures and Signing for Road Works and Temporary Situations 2009, as amended.
- All dimensions shown in metres (m) unless otherwise stated, and all levels relate to Ordnance Datum.
- The contractor shall confirm the CBR of the subgrade in order to determine the required subbase thicknesses, and the Highway Inspector is to be present during inspections/CBR testing.
- Prior to laying any material the subgrade must be proof rolled and inspected and any soft spots removed and filled with type 2 material to SHW Clause 804. The sub-formation and formation shall be prepared in accordance with SHW clause 616.
- Where fill is required beneath sub-formation or formation, this shall be carried out in accordance with SHW clause 608.
- Fill to road embankments shall be constructed in accordance with SHW clause 608 with materials complying with SHW Table 6/1 to meet compaction requirements of SHW clause 612 and SHW Table 6/4.
- All materials within 450mm of finished levels should be non-frost susceptible.
- All gully tops and manhole covers shall comply with BS EN124 and BS7903. Class D400 covers shall be used in carriageways (including pedestrian streets) and parking areas. Class 8125 covers shall be used in footways/pedestrian areas.
- Permanent road markings shall be thermoplastic road marking material complying with SHW clause 1212.
- All street lighting must comply with the requirements of Wiltshire Council's Specification.
- All tactile paving surfaces shall be laid out in accordance with DET's 'Guidance on the use of Tactile Paving Surfaces'.
- All existing vegetation that overhangs the footway shall be cut back. Notices shall be given to the owner of the vegetation, or occupier of the land on which it is situated, to require its removal within 14 days of the date of service of the notice.
- The Contractor shall verify the invert levels of any existing inspection chamber/manhole or pipe, where drainage connections are to be made, prior to commencement of drainage works. Any discrepancies with levels and gradients shown on the construction issue drawings must be reported to PFA Consulting and the Contractor shall seek clarification regarding any construction issue prior to continuing the drainage works.
- For areas to be broken up, refer to landscaping drawings provided by Pegasus.
- All gullies are to be jetted and cleared.
- All lighting columns are to drawing P18372-01-A.
- For traffic signs, road markings, signals and lighting site clearance refer to PB76-A3,122 - 126.

Rev	Date	Description	Drawn	Check
B	05/04/22	Note 14 amended in accordance with Atkins comments dated 26/03/22.	RCI	CI
C	30/05/22	Cycle route preferred option note added.	RCI	CI
D	02/08/23	Technically Approved	TLH	RCI

Status

Technically Approved

Client

**Ashton Park
Trowbridge Ltd and
Persimmon Homes Ltd**

Project

**Yarnbrook and
West Ashton
Relief Road**

Drawing Title

**Area 3
General Arrangement
Sheet 2 of 4**

Drawing No. **P876-A3/103** Rev D

Date: July 2019 Scale: 1:200 @ A0

E-Mail: bclayton@pfapl.com