


APPENDIX 4

Tree Removal Plan

Arboricultural Impacts: Summary (For details, see below)		
Impact	No. of Trees	
Trees to be removed	29	
Groups of trees to be partially removed	3	
Trees to be pruned	3	
Trees to be Removed (Mature specimens)		
No.	Species	Category
1	Crabapple	B(1)
2	Flowering cherry	C(1)
14	Large-leaved lime	C(12)
16	Large-leaved lime	C(2)
21-25	Large-leaved lime	C(13)
33	Weeping beech	C(2)
57	English oak	C(1)
58	Beech	C(1)
59	Beech	C(1)
80	Beech	B(1)
89	Large-leaved lime	C(2)
90	Large-leaved lime	C(12)
91	Large-leaved lime	B(1)
101	Large-leaved lime	C(2)
102	Large-leaved lime	B(1)
104	Large-leaved lime	B(1)
105	Large-leaved lime	C(1)
106	Large-leaved lime	C(13)
115	Siberian alder	U(2)
113	Siberian alder	U(1)
115	Beech	B(2)
126	Beech	B(1)
131	Beech	B(12)
132	Beech	B(12)
136	Beech	C(2)
Total numbers of trees to be removed		
Category	No. of trees	No. of trees
A	0	5
C	22	2
Trees to be pruned		
No.	Species	Works
123	Beech	a) Crown lift south-west canopy to 5.5m above ground level b) Reduce south-west canopy by 2m from branch tip to the trunk
124	Beech	a) Crown lift south-west canopy to 5.5m above ground level b) Reduce south-west canopy by 2m from branch tip to the trunk
123	Beech	a) Crown lift south-west canopy to 5.5m above ground level b) Reduce south-west canopy by 2m from branch tip to the trunk
Pruning to be undertaken in accordance with the British Standard Recommendations for Tree work, BS3998: 2010. Climbing trees or walls are not to be used as a support for pruning trees.		

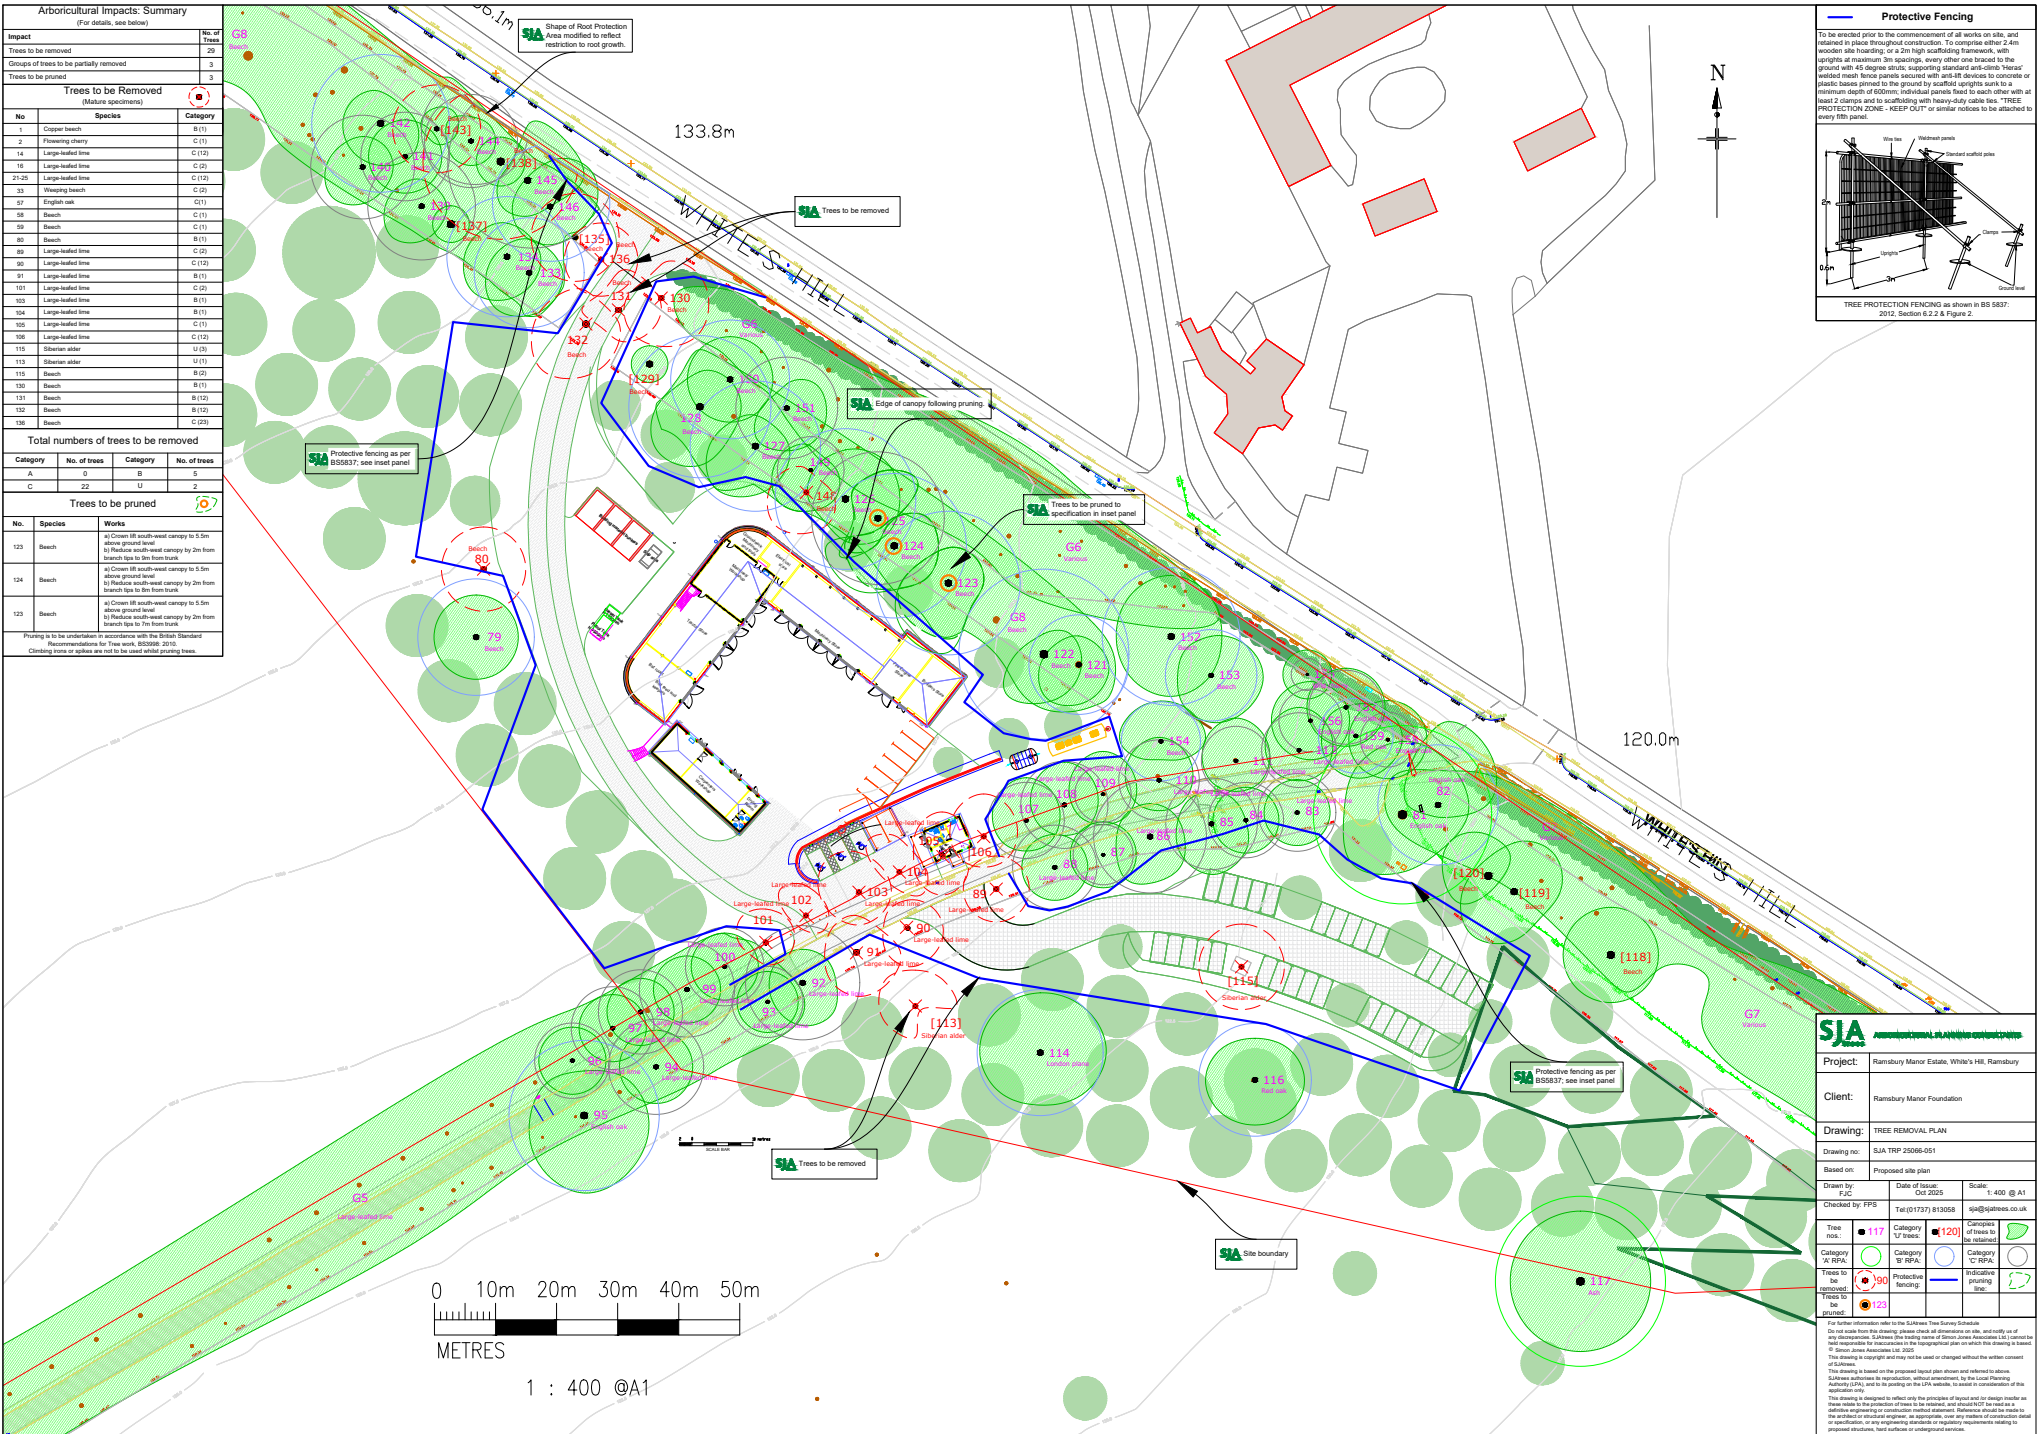

Protective Fencing

To be erected prior to the commencement of all works on site, and retained in place throughout construction. To comprise either 2.4m wooden site hoarding or a 2m high scaffolding framework, with uprights at maximum 3m spacings, every other one braced to the ground with 45-degree struts supporting standard and climb 'Hera' welded mesh fence panels secured with anti-tilt devices to concrete or plastic bases pinned to the ground by scaffolded uprights sunk to a minimum depth of 600mm; individual panels fixed to each other with at least 2 clamps and to scaffolding with heavy-duty cable ties. 'TREE PROTECTION ZONE - KEEP OUT' or similar notices to be attached to every 10th panel.

TREE PROTECTION FENCING as shown in BS 5837: 2012, Section 6.2.2 & Figure 2

SJA ARBORESCENT PLANNING CONSULTANTS

Project: Ramsbury Manor Estate, White's Hill, Ramsbury

Client: Ramsbury Manor Foundation

Drawing: TREE REMOVAL PLAN

Drawing no: SJA TRP 2506-051

Based on: Proposed site plan

Drawn by: FJC Date of issue: Oct 2025 Scale: 1:400 @ A1

Checked by: FJB Tel: (01753) 813558 sjaplanning.co.uk

Tree nos:	117	120
Category 'A' RPA:	Category 'B' RPA:	Category 'C' RPA:
Trees to be removed:	Protective fencing:	Pruning line:
Trees to be pruned:		

For further information refer to the SJA Arboricultural Planning Consultancy. Do not scale from this drawing, check all dimensions on site, and notify us of any discrepancies. SJA reserves the right to amend this drawing without notice and is not responsible for inaccuracies in the topographical plan on which this drawing is based. © SJA Arboricultural Planning Consultancy Ltd. 2025

This drawing is copyright and may not be used or changed without the written consent of SJA.

Subsides advanced to registration, without agreement, by the Local Planning Authority (LPA), and is to be used in the LPA's interests, to amend or supplement this application only.

This drawing is designed to reflect only the principles of layout and for design reader use. It does not constitute a guarantee of the accuracy of the information contained therein. It is not a definitive engineering or construction method statement. Reference should be made to the technical specification, design, or construction, and any notices of construction detail or specifications, or any engineering standards or regulatory requirements relating to proposed structures, best practice or other relevant standards.

Arboricultural Impacts: Summary
(For details, see below)

[illegible]

APPENDIX 5

APPENDIX 6

