Proposed New Dwelling On Plot 2,
West Winds,
72 Netherstreet,
Bromham,
Wiltshire,
SN15 2DP

Planning Approval Reference: Wiltshire Council Case No: PL/2023/02772

Condition 5 - Materials

Major Construction Material Specifications


A. General Specification

Main House to be timber frame construction with a brick plinth with a mix of rendered walls and horizontal timber cladding. Natural slate to be used to the roof.

Main House



Garage to be of masonry construction, finished with brick plinth with render above. Gables ends to be finished with horizontal timber cladding.

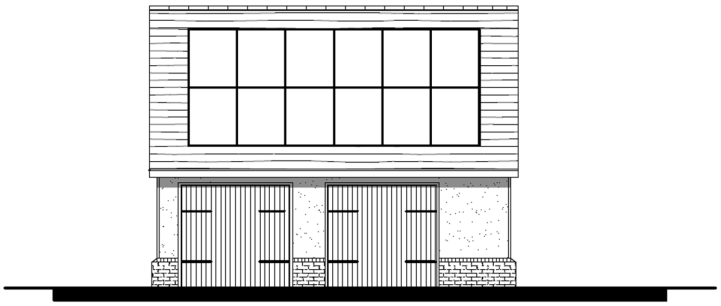

B. Detailed Material Specifications

1. Brick plinth to be made of Wienerberger Kassandra Red Multi bricks.

   The photograph below illustrates the colour mix of the proposed brick.



2. The render is to be a through colour render in off-white. Image of render colour provided below.



3. Horizontal timber cladding to be Brimstone Ash by Vastern.



4. Roof tiles to be Cupa Pizarras H12 Natural Slate.

