AYERS FORESTRY LIMITED

TREE SURVEY SCHEDULE

Client: Robert Frankton

Site: The Old House

Date of Survey: Summer 2023

Surveyor: Jonathan Ayers

Weather: Clear

Tagged: No

Tree Details						Hazard Assesement						Comment	Works Required	Work Priority
Tree ID	Common Name	Stems	Height (m)	Stem Dia (mm)	Spread Radius (m)	Maturity	Overall	Branches	Leaf/Buds	Roots	Stem			
1	Cherry	1	16	300	5	Mature	Fair	Minor dead wood	Normal	Abrasion to surface roots	No visual defect	Deadwood in crown. Minor deadwood throughout walnut, one dead lateral branch at head height.	Remove deadwood in Cherry and dead lateral branch in Walnut	12mths
2	Monterey cypress	2	22	600	7	Mature	Fair	Minor dead wood; Major dead wood	25% dead / absent	Adjacent to stone wall	Bark wounds; Fungus or decay	Two mature trees. One has had a stem fail in the past resuting in a cavitiy near the base of the tree. Both have deadwood on one side that may be the result of fire damage.	Remove deadwood sympathetically to the shape of tree.	12mths

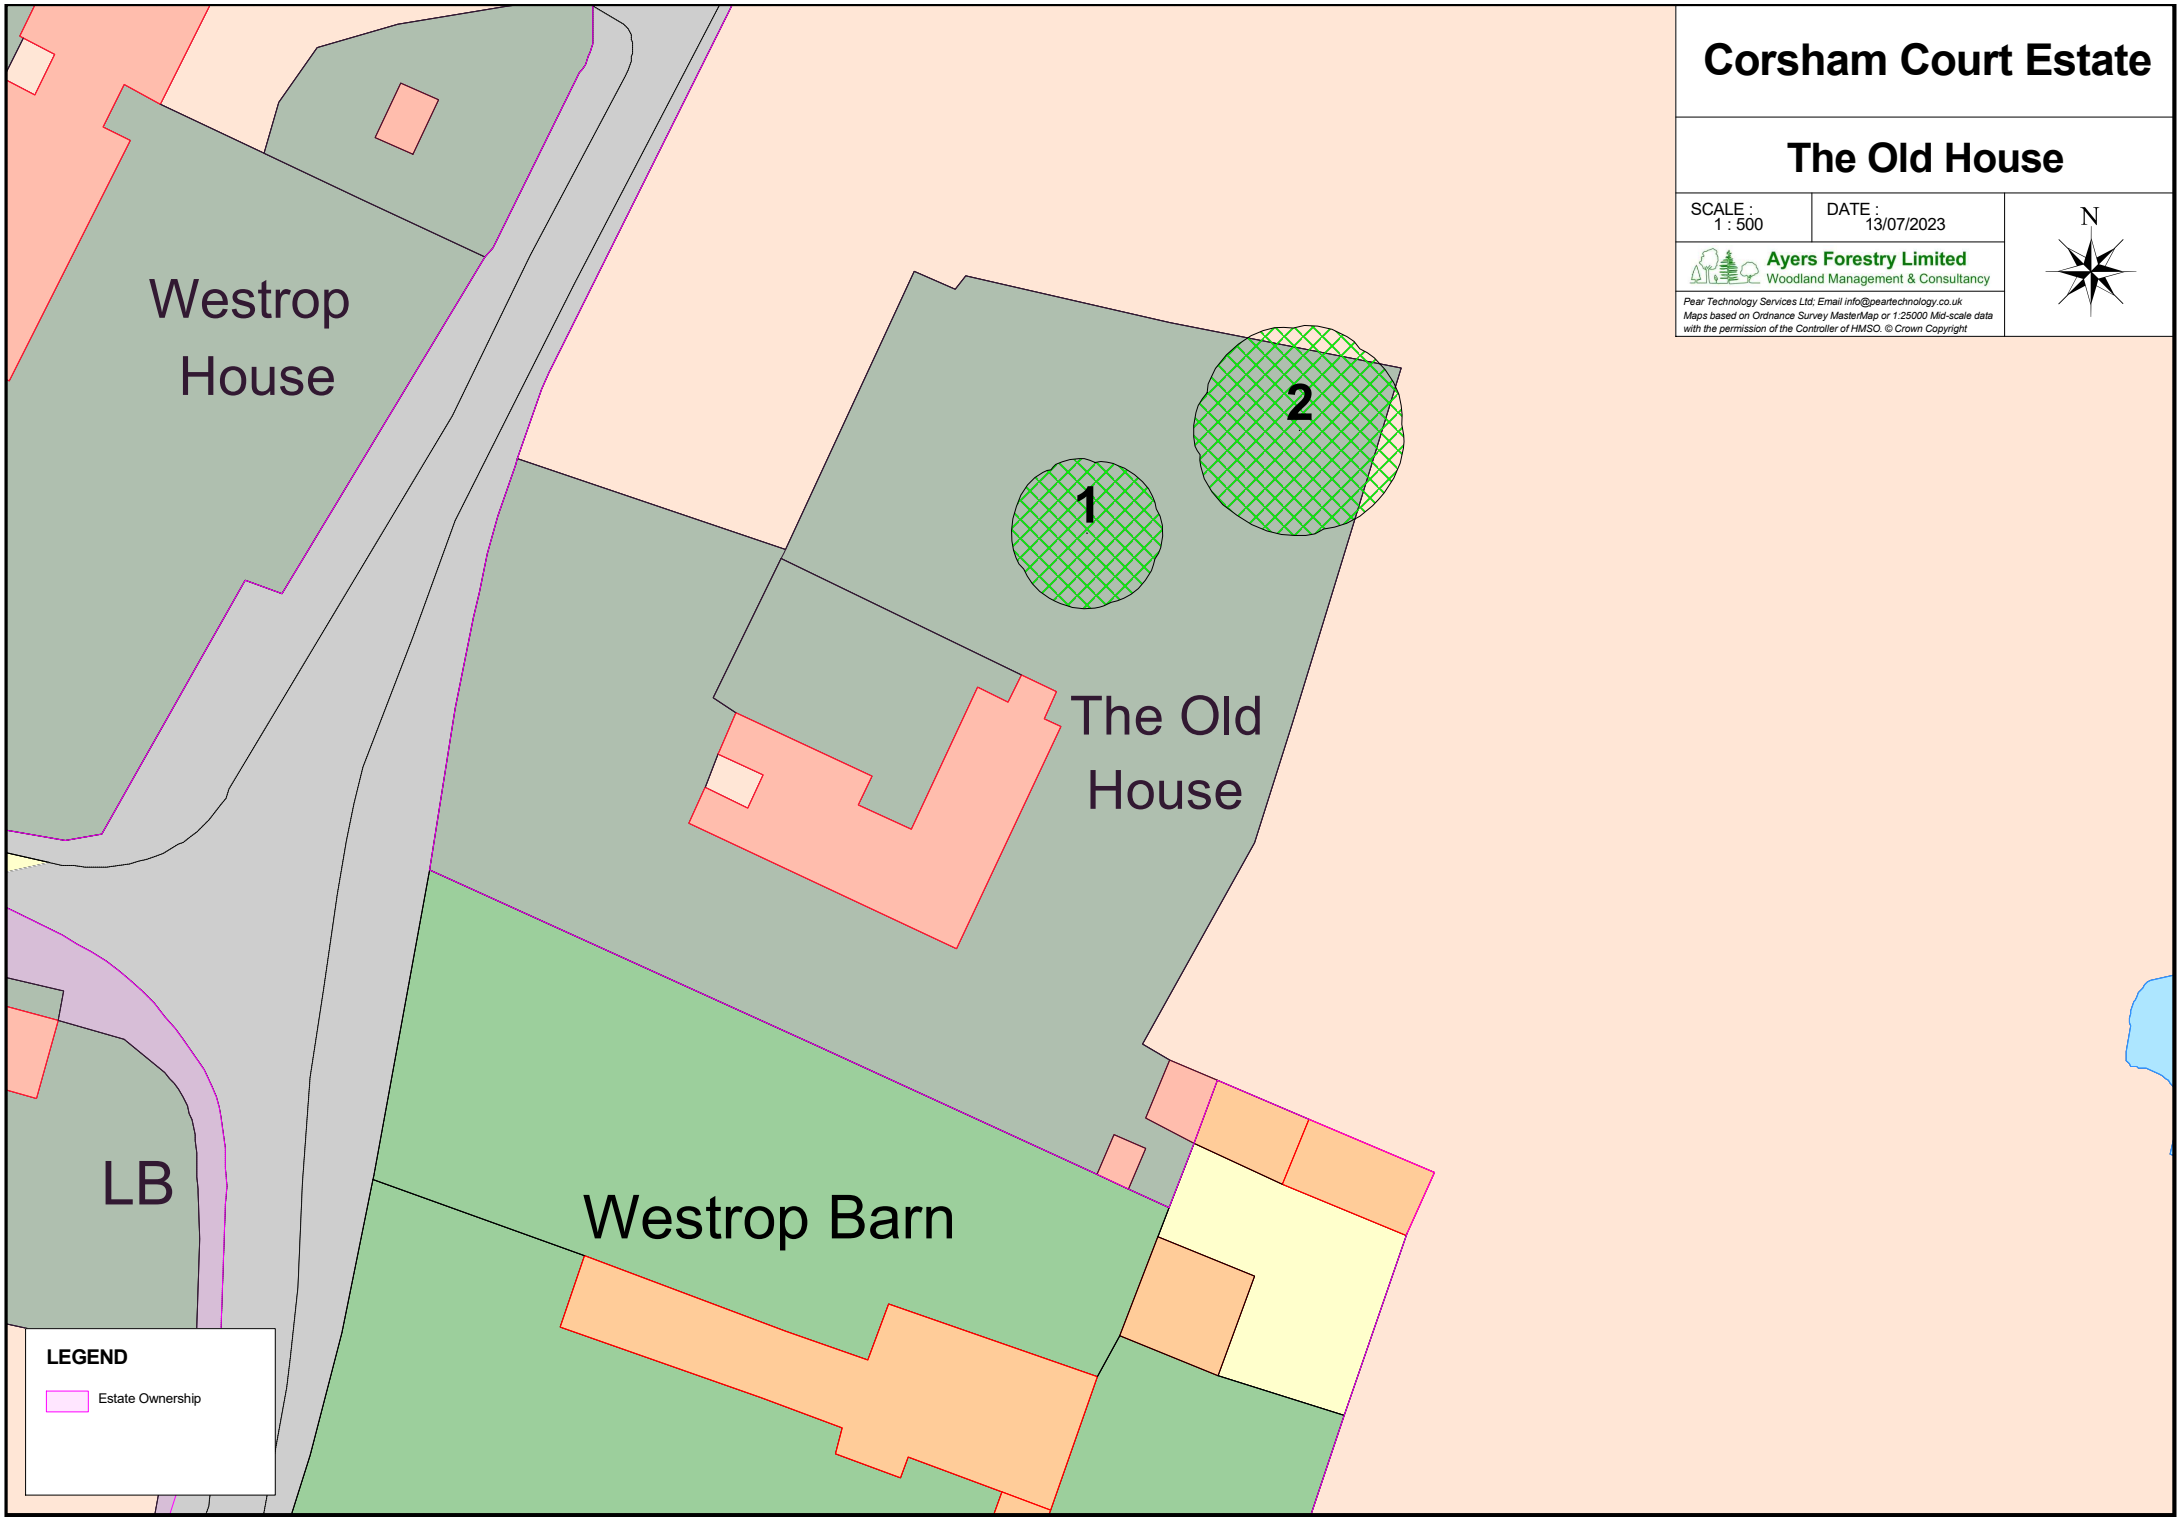

Corsham Court Estate

The Old House

SCALE : 1 : 500

DATE : 13/07/2023

N

Ayers Forestry Limited
Woodland Management & Consultancy

Pear Technology Services Ltd: Email info@peartechnology.co.uk
Maps based on Ordnance Survey MasterMap or 1:25000 Mid-scale data with the permission of the Controller of HMSO. © Crown Copyright