Ground Control Limited
Kingfisher House
Radford Way, Billericay
Essex, CM12 0EQ

Quotation

[redacted]

Date
Our Ref: 582086.sw23

FAO:
Email:

Cloud FM Integrated Services Ltd
ATS Euromaster
120-121 London Road
Marlborough
SN8 1AH

To whom it may concern,

Given my recent visit to site on 13th October 2023, I can now provide you with a comprehensive quotation for tree works at the ATS Euromaster site in Marlborough.

Quote Specification and Costing:

1. *Our certified team will install a safe working zone using cones and directional signage.*
2. *The team will then proceed to carry out a 3-4M uplift to the group of Goat Willow trees located at the rear area of the site next to the shallow river to remove overhanging branches that are entering the river and the neighbours opposite.*
3. *Team to use LOLER safe rigging equipment and safe climbing practices. Team to also use extension pole chainsaws and extension loppers. Chest waders will be required.*
4. *All waste to be processed through a woodchipper for suitable disposal off site.*

Additional Details:

Please find below additional details relating to this quote:

- All work areas will require cordening off to create a safe working zone prior to works commencing
- Current boundary lines are marked within the fence line. Any areas outside of the marked boundary lines will be classed as additional areas unless agreed prior to commencement
- Watering has not been allowed for in this quotation. Should you wish us to supply an irrigation service I would be happy to produce a separate quotation for this
- If trees are subject to a Tree Preservation Order (TPO) or are situated within a Conservation Area, consent will be required from the Local Planning Authority before works can commence. We would make any TPO applications on your behalf as part of the works. Works to neighbouring trees will require the owner's written permission in advance before works can begin
- For all tree works these will be carried out by our NPTC trained Arboriculture certified team using rope and harness techniques, chainsaws, chippers and various hand tools where applicable, as per the areas identified within the Site Plan overleaf
- With any tree or shrub works, Ground Control must ensure that no nesting birds are disturbed under the Wildlife and Countryside Act 1981, Countryside and Rights of Way Act 2000 and the European Habitats Directive 1992/Nesting Birds Directive. The 'Bird Nesting Season' is from March until August inclusive. If any works are requested to be carried out within these months we will perform bird nesting checks prior to the work commencing. If active nests are found, the tree/shrubs must not be worked on and we will inform you of this immediately

Our Commitment:

Ground Control, founded in 1973, is an award winning commercial grounds maintenance contractor that also provides a number of other services including landscape construction, arboriculture, winter maintenance, pothole repairs, fencing, electric vehicle charge point installations and treatment of invasive weeds, as well as designing a wide range of incredible outside spaces including the newly unveiled Children's Garden at Kew Gardens in 2019.

We have used our significant heritage to our advantage, along with our complete commitment to providing outstanding customer service to deliver bespoke solutions to a huge range of clients within your very sector. Our proven track record is reflected in our 99% annual retention rate with some of our biggest clients including Tesco, Sainsbury's, Severn Trent and Travelodge.

Our commitment to you, as with all Ground Control works, is that we guarantee that these will be completed by fully trained and qualified operatives at all times and any waste will be disposed of at a licensed facility unless otherwise specified within our quotations.

Our Price Promise:

Our quoted price is inclusive of all labour, materials and delivery charges. The price is fixed and valid for a period of 30 days from the date of this letter.

Next Steps:

I hope this quotation meets with your approval. To proceed, please provide your approval by return email within the next 30 days including:

- A PO number
- The Ground Control reference number for this job (582086.sw23)
- Any dates you need to make us aware of
- If you are interested in exploring the use of any other services we offer including landscape construction, arboriculture, winter maintenance pothole repairs, fencing, electric vehicle charge point installations, treatment of invasive weeds and design

Once we have your instruction I will schedule the works with our team, which will be completed within 2 weeks in line with our service commitment to you and carried out as per the terms of our agreement.

Your Key Account Manager will be in touch in a week's time if we have not heard back from you to ensure you have everything you need in order to make your decision.

Yours Faithfully,

Richard Baldwin


[redacted]

Enclosed: Supporting Evidence – Map and Site Visit Photographs
Quote Validity Guarantee

Supporting Evidence

Map:

I attach a site plan, taken from Google Maps, with pins to mark the areas where each of the quoted works outlined will take place.

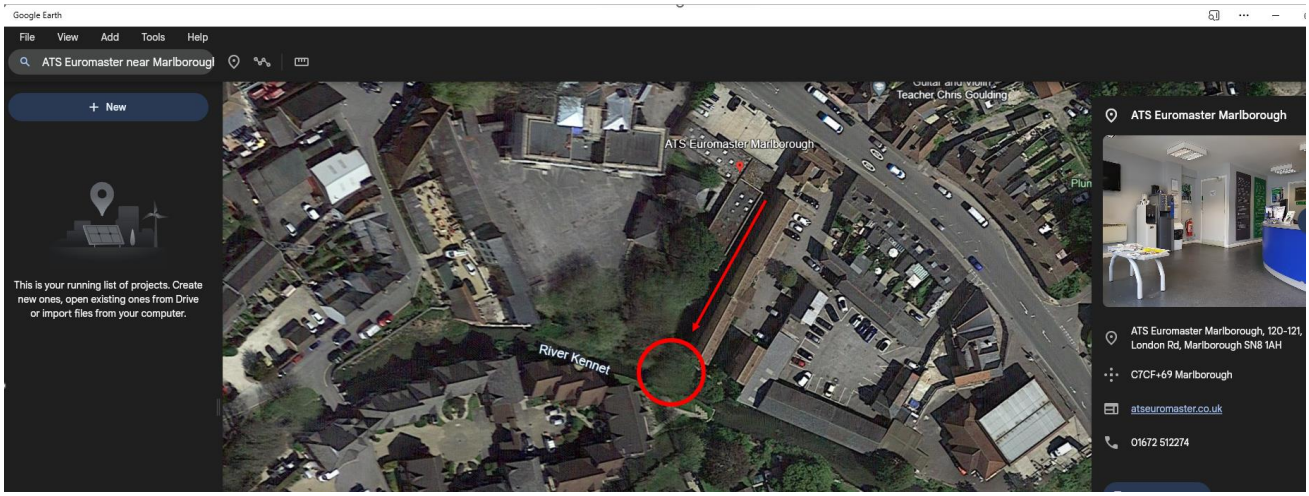

Site Visit Photographs:

Photographs taken on my site visit are also attached below.

