



SOUTH ELEVATION / STREET VIEW

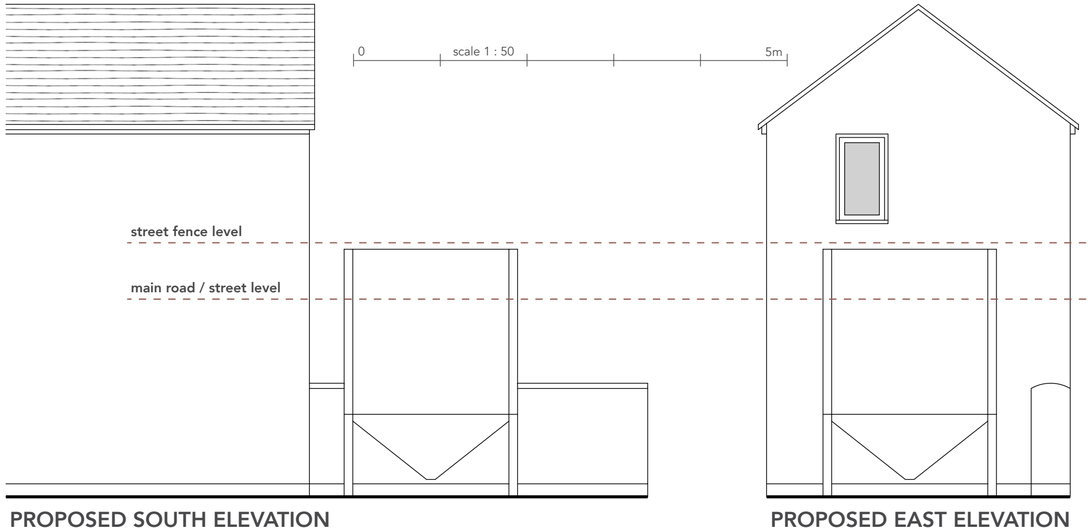

PROPOSED SOUTH ELEVATION

PROPOSED EAST ELEVATION

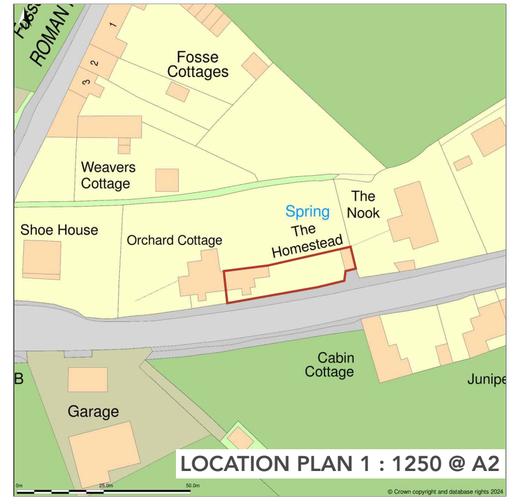



SOUTH ELEVATION




4 TONNE HOPPER
(refer to Pellet Storage PDF for specifications)



EAST ELEVATION



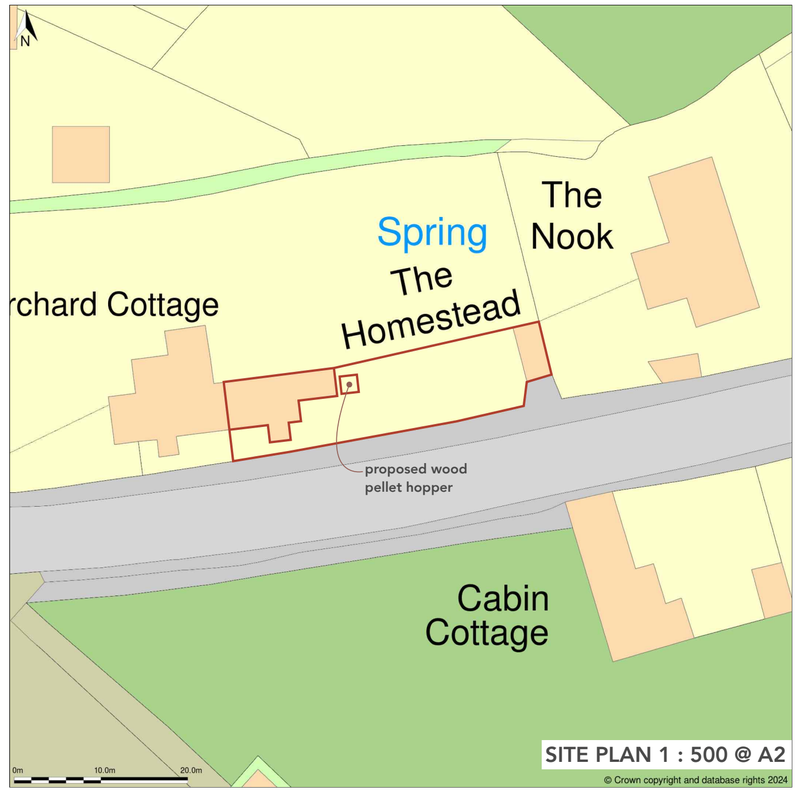

PROPOSED WORKS:

- Install four tonne pellet storage hopper to ground at east end of dwelling to supply sustainable heating and hot water system in house.
- Hopper to stand on concrete slab (to be specified by supplier) with suitable surface water drainage next to house and boundary wall.
- 2m x 2m x 4.8m hopper, timber clad on all visible sides, as per image.
- Further details on hopper have been submitted as '2 Pellet Storage' PDF.
- With the hopper screened-off and standing well below the street / main road level, we believe the proposed works would not have detrimental impact on the street scene or surrounding area.

all dimensions to be confirmed on site
all works to be carried out in accordance with current Building Regulations
drawings and design copyright of SE Architecture and may not be copied, altered or reproduced without authority

project:

The Homestead. The Shoe, Chippenham. SN14 8SD

drawing:

Planning Documents

1 : 50 on A2

January 2024

SE Architecture
07814 685519
www.se-architecture.co.uk