

1. South-East Elevation C-C

1 : 50

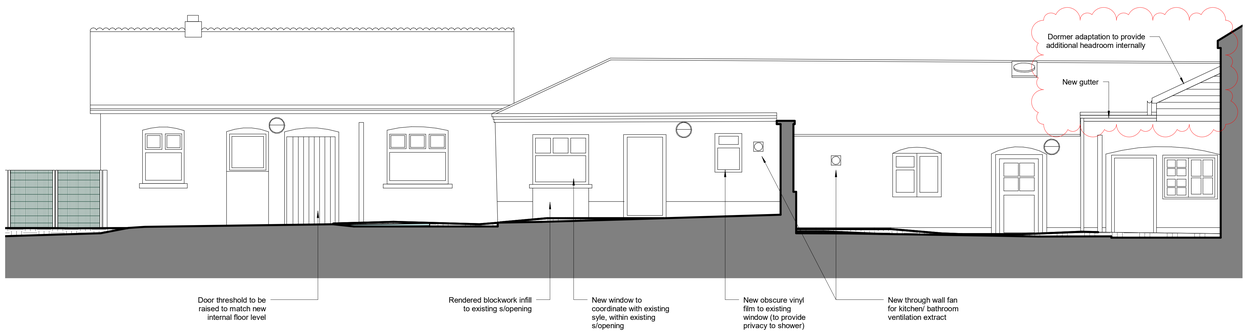

2. North-West Courtyard Elevation D-D

1 : 50





Elevations

All elevations to remain as existing unless noted otherwise.
Proposed elevation changes are annotated on this drawing.

General Note

This drawing has been prepared with limited access to the existing building.
A detailed intrusive condition survey and good site access will be required to confirm these proposals.
Drawing based on existing survey information provided by Wiltshire Council.
Drawing to be read in conjunction with existing survey plan and elevation drawings.

SAFETY, HEALTH & ENVIRONMENTAL RISKS

In addition to the risks normally associated with
The types of work detailed on this drawing, note
The following risks and information:

ASBESTOS
The Existing building fabric and services contains asbestos. Asbestos Containing Materials are identified in *Asbestos Management Survey* (ref: 01002S1-2012) provided by AC&MS Ltd. Additional specific risk items may be discovered as intrusive work and/or demolition works commence.
Licenced specialist contractor to undertake asbestos mitigation works prior to commencing works.
Contractor to consult asbestos register and carry out further testing as required prior to Commencing works.
refer to : SWS-AHR-EA-ZZ-DR-A-200045 Asbestos Works

WORK AT HEIGHT
Scope of works to existing building fabric includes
Work at height - ensure that appropriate means of Access and rams are in place and agreed prior to Carrying out any work on high level services.

STRUCTURE
Structural unknowns pose a risk to dismantling/ demolition works. Temporary works design will likely require intrusive investigation including, but not necessarily limited to, foundations and slabs.

BELOW-GROUND WORKS
Existing live site services are present. Contractor to review buried services survey drawing and find any remaining services before digging.



Scale Bar 1-50 (metres)
1 : 50

Rev	Description	Date	Dr by	App by
C02	Issued for Listed Building Consent: Bubbles and associated notations indicate alterations to scope from LBCPL/2021/06837	11 07 2024	NK	MC
C01	Issued for Listed Building Consent	28 04 2023	NK	MC
P01	Issued for Costing	06 03 2023	MP	MC

original by: NK
date created: 06/06/21
Approved by: MC

AHR Architects Ltd
8th Floor
Clifton Heights
Triangle West
Bristol
BS8 1EJ
United Kingdom

T +44(0)117 9299146
E bristol@ahr.co.uk
www.ahr.co.uk

client.name: Wiltshire Council
project: Silverwood School Refurbishment
drawing: Rowdeford House
Proposed GA Elevations 02
status: A3 - RIBA STAGE 3

project number	scale
2022.00488.000	As indicated@A0
drawing number	issue status / rev.
SWS-AHR-EA-ZZ-DR-A-200101	A3 / C02

This drawing is to be read in conjunction with all related drawings. All dimensions must be checked and verified on site before commencing any work or producing shop drawings. The originator should be notified immediately of any discrepancy.
This drawing is copyright and remains the property of AHR.