


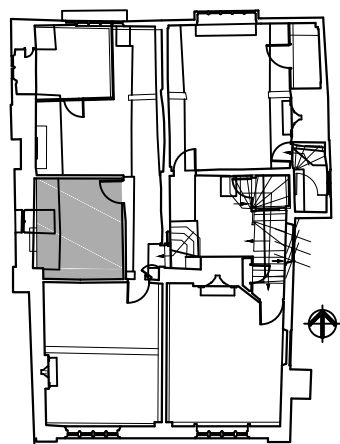

Mezzanine and
First floor plans NTS

For cupboard details, see drawing
number -----

Bathroom F08

Bulkhead over new stairs to achieve at
least 30 mins. fire resistance.
100x50mm studwork with 12.5mm
Firecheck plasterboard soffit.
T&G floor boards to upper surface.
Mineral wool insulation between studs.

FL 50.85

New Cupboard

Existing plaster finishes made good
to match existing

Existing beam in studwork wall retained.

Bedroom F06

Existing floor beam retained.

FL 50.05

Room M03

New stair width approx. 850mm
(to fit between existing floor beams)
Check on site.

New beam to support top of stairs.
refer to Consultant Structural engineer's details.

FL 48.52

→95←

900

45 deg.

Section Looking West

Title : 17 Cathedral Close Salisbury SP1 2EB

Drawing : Detail Specifications fro repair works to:

Room M03 - Stairs to F06

Revisions : Rev Date

Scale : A3 1:20

Drawn : CP

Date : December 2025

Drawing No.

1306.D.10

Do not scale from drawings, use dimensioned
figures only and report any discrepancies to the
Architect's office.

All rights described in Chapter IV of the
Copyright, Design and Patents Act 1988 have
been generally asserted.



1:20 scale correct when printed at A3