




STEELYTE SLIM LEADED OPENER

SCALE 1:5

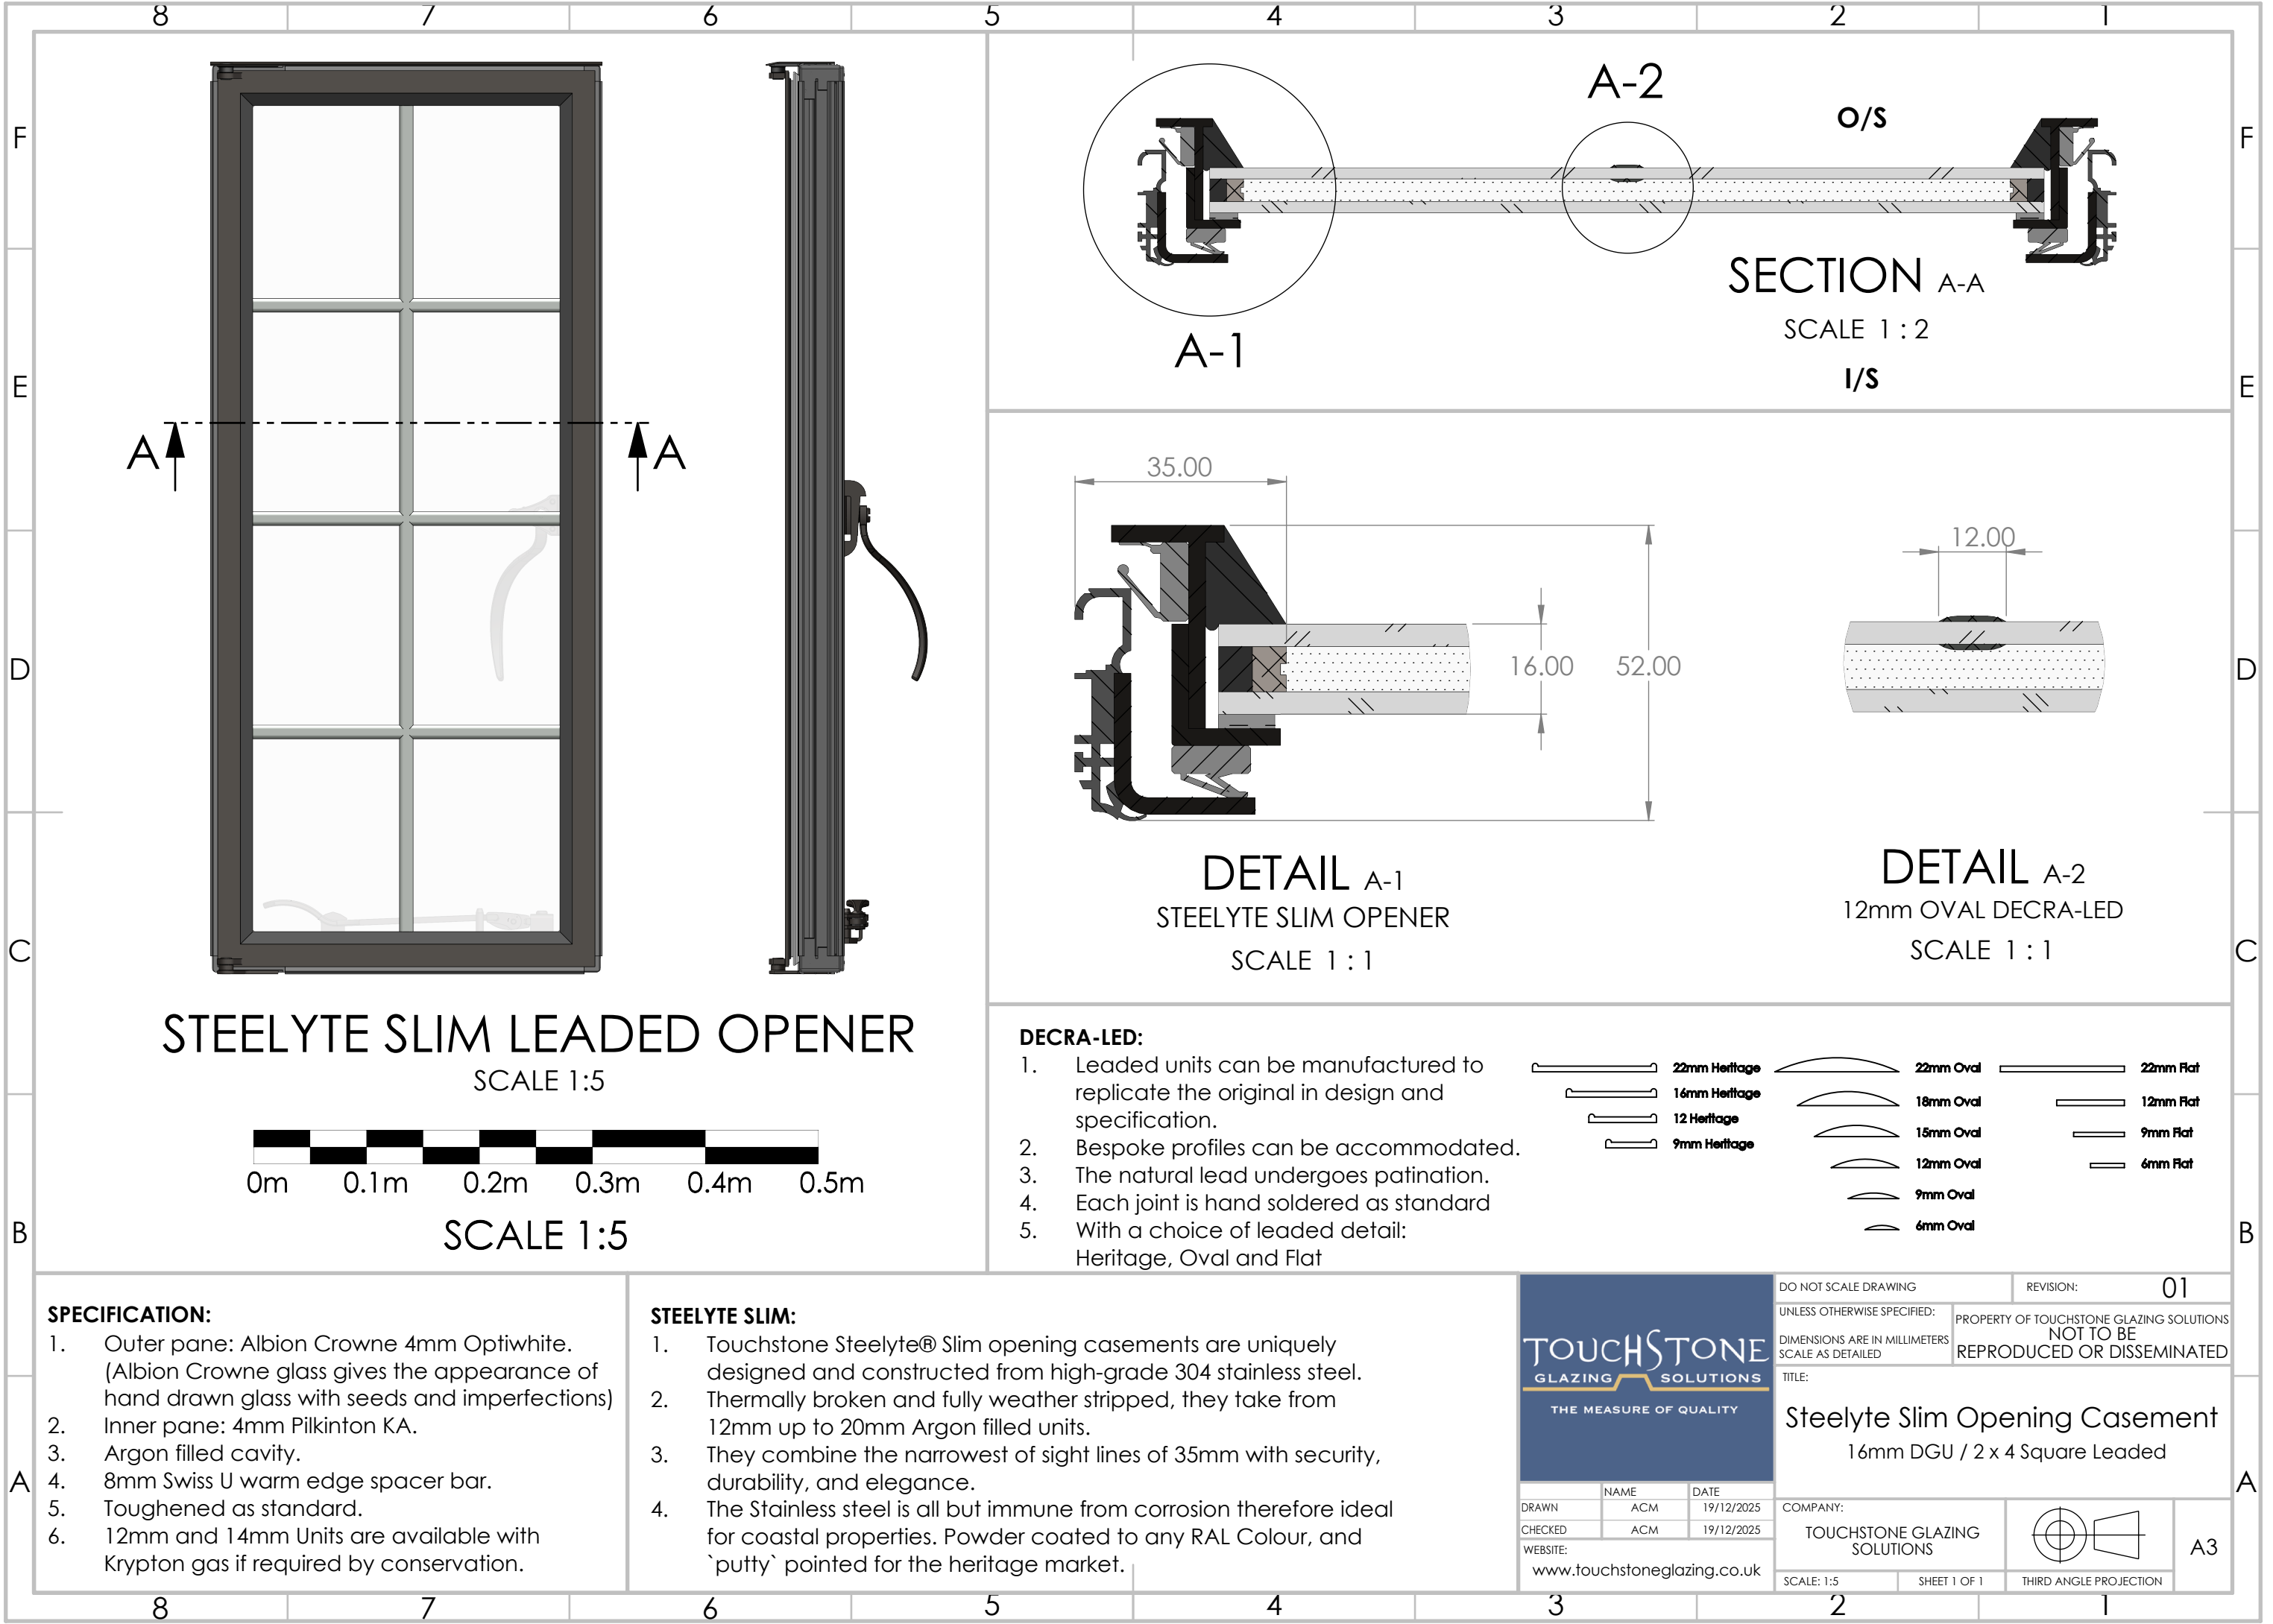

SCALE 1:5

SPECIFICATION:

- Outer pane: Albion Crowne 4mm Optiwhite. (Albion Crowne glass gives the appearance of hand drawn glass with seeds and imperfections)
- Inner pane: 4mm Pilkinton KA.
- Argon filled cavity.
- 8mm Swiss U warm edge spacer bar.
- Toughened as standard.
- 12mm and 14mm Units are available with Krypton gas if required by conservation.

STEELYTE SLIM:

- Touchstone Steelyte® Slim opening casements are uniquely designed and constructed from high-grade 304 stainless steel.
- Thermally broken and fully weather stripped, they take from 12mm up to 20mm Argon filled units.
- They combine the narrowest of sight lines of 35mm with security, durability, and elegance.
- The Stainless steel is all but immune from corrosion therefore ideal for coastal properties. Powder coated to any RAL Colour, and 'putty' pointed for the heritage market.

DECRA-LED:

- Leaded units can be manufactured to replicate the original in design and specification.
- Bespoke profiles can be accommodated.
- The natural lead undergoes patination.
- Each joint is hand soldered as standard
- With a choice of leaded detail: Heritage, Oval and Flat

	22mm Heritage		22mm Oval		22mm Flat
	16mm Heritage		18mm Oval		12mm Flat
	12 Heritage		15mm Oval		9mm Flat
	9mm Heritage		12mm Oval		6mm Flat
			9mm Oval		
			6mm Oval		

TOUCHSTONE
GLAZING SOLUTIONS
THE MEASURE OF QUALITY

DRAWN	NAME	DATE
CHECKED	ACM	19/12/2025
WEBSITE:	ACM	19/12/2025

www.touchstoneglazing.co.uk

DO NOT SCALE DRAWING

REVISION: 01

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SCALE AS DETAILED

PROPERTY OF TOUCHSTONE GLAZING SOLUTIONS
NOT TO BE
REPRODUCED OR DISSEMINATED

TITLE:
Steelyte Slim Opening Casement
16mm DGU / 2 x 4 Square Leaded

COMPANY:
TOUCHSTONE GLAZING SOLUTIONS

A3

SCALE: 1:5

SHEET 1 OF 1

THIRD ANGLE PROJECTION